

SIRIUS Down
Light



APPLICATION

Hotels, Shopping centers, Malls, Hospitals, Shops, Offices, Schools, Restaurants, Villas, Palaces, Apartment.... etc.



FEATURES

Sirius family contains a lot of amazing and modern design with different features such as pre-embedded design, quick installation, convenient maintenance of lamps and lanterns.

Suitable for all kinds of ceiling thickness, Maximum up to 30mm.

Can be dimmable (through direct control or via network).




Sirius Down Light

PRODUCT DETAILS


Family Name	Sirius
Part Number	SIR-X-X-5W-S/T-XXXX
Cutout	Ø50mm
Size(HxWxL)	73x60mm/73x60x60mm
Driver	5 Watt constant current (dimming optional)
Color Rendering Index CRI	80% or 90%
Beam Angle	10° / 24° / 38°
Storage Temperature	- 40 - +85°C
IP Rating	-IP20
Lifespan	50,000 Hours
COB type	Citizen, Cree, Philips, Bridglux
Input	220 / 50- 60Hz
Power Factor Correction PFC	>.90
Reflector Color	Sand gold / White/ Chrome/ Silver / Pearl Black/ Black
Flux	600 Lumen
Correlated Color Temperature CCT	2700K / 3000K / 4000K
Warranty	Up to 5 Years

FEATURES

- ◆ Reflector cover, 6 colors are optional to meet the needs of different occasions.
- ◆ The Driver is included and it can be IP20 or IP67 (as an option) and PF>0.9. Dimming Optional.
- ◆ Deep reflection cup, UGR < 16.
- ◆ Suitable for all kinds of ceiling thickness, maximum, up to 30mm.
- ◆ Light is filtered through reflecting cup and anti-glare honeycomb to effectively reduce excess beam.
- ◆ Rotate 355 degrees horizontally. Every rotation is just right.
- ◆ Pre-embedded design, quick installation and convenient maintenance of lamps and lanterns.
- ◆ Innovation and High Efficiency Black Light Mirror.
- ◆ Four-stop tilt angle adjustment, positioning circle inside, and ni-stop are just right.

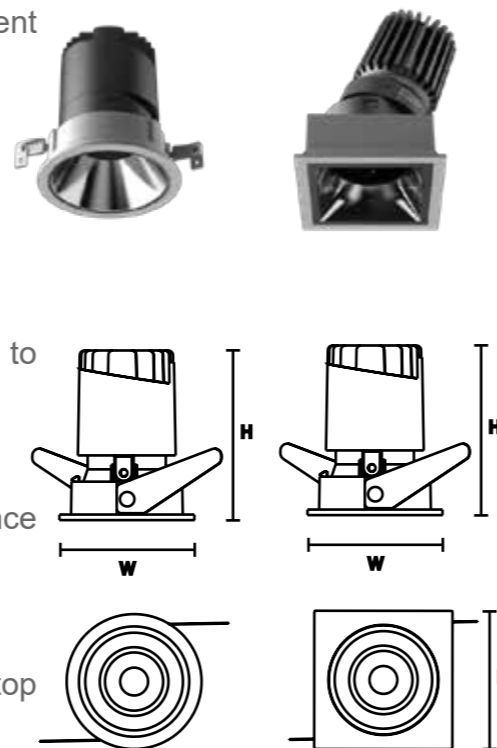

BEAM ANGLE

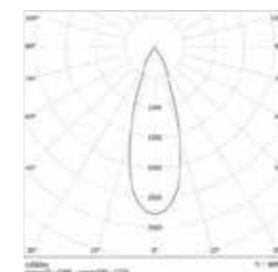

PRODUCT APPLICATION

Shopping centers, Malls, Hospitals, Shops, Offices, Schools, Restaurants, General Lighting etc..



PRODUCT DIMENSION

Model	H mm	W mm	L mm
SIR-S-X-5W-S/T-XXXX	73	60	60
SIR-R-X-5W-S/T-XXXX	73	60	---

Order Code

Color Temperature

LED Power

SIR-R-N-5W-S/T-XXXX

2700K / 3000K / 4000K

5W

SIR-S-N-5W-S/T-XXXX

2700K / 3000K / 4000K

5W


Sirius Down Light

PRODUCT DETAILS


Family Name	Sirius
Part Number	SIR-X-X-12W-S/T-XXXX
Cutout	Ø75mm
Size(HxWxL)	104x86mm/104x86x86mm
Driver	12 Watt constant current (dimming optional)
Color Rendering Index CRI	80% or 90%
Beam Angle	10° / 24° / 38°
Storage Temperature	- 40 - +85°C
IP Rating	-IP20
Lifespan	50,000 Hours
COB type	Citizen, Cree, Philips, Bridglux
Input	220 / 50- 60Hz
Power Factor Correction PFC	>.90
Reflector Color	Sand gold / White/ Chrome/ Silver / Pearl Black/ Black
Flux	1440 Lumen
Correlated Color Temperature CCT	2700K / 3000K / 4000K
Warranty	Up to 5 Years

FEATURES

- ◆ Reflector cover, 6 colors are optional to meet the needs of different occasions.
- ◆ The Driver is included and it can be IP20 or IP67 (as an option) and PF>0.9. Dimming Optional.
- ◆ Deep reflection cup, UGR < 16.
- ◆ Suitable for all kinds of ceiling thickness, maximum, up to 30mm.
- ◆ Light is filtered through reflecting cup and anti-glare honeycomb to effectively reduce excess beam.
- ◆ Rotate 355 degrees horizontally. Every rotation is just right.
- ◆ Pre-embedded design, quick installation and convenient maintenance of lamps and lanterns.
- ◆ Innovation and High Efficiency Black Light Mirror.
- ◆ Four-stop tilt angle adjustment, positioning circle inside, and ni-stop are just right.

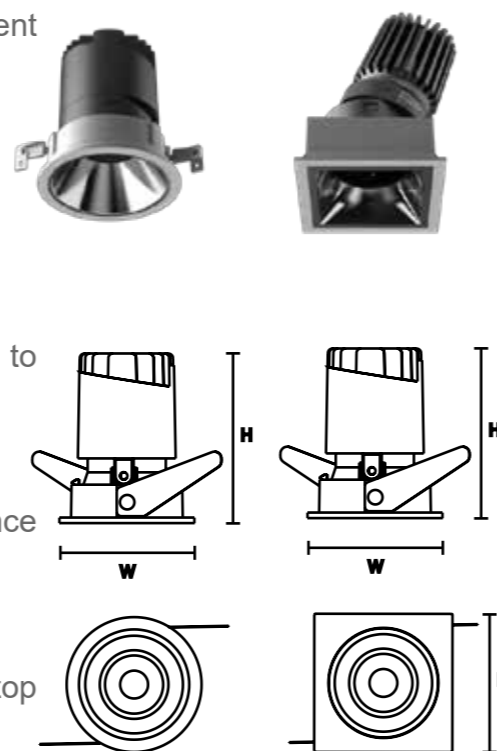

BEAM ANGLE

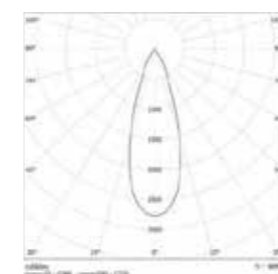

PRODUCT APPLICATION

Shopping centers, Malls, Hospitals, Shops, Offices, Schools, Restaurants, General Lighting etc..



PRODUCT DIMENSION

Model	H mm	W mm	L mm
SIR-S-X-12W-S/T-XXXX	104	86	86
SIR-R-X-12W-S/T-XXXX	104	86	---

Order Code

Color Temperature

LED Power

SIR-R-N-12W-S/T-XXXX

2700K / 3000K / 4000K

12W

SIR-S-N-12W-S/T-XXXX

2700K / 3000K / 4000K

12W



Sirius Down Light

PRODUCT DETAILS


Family Name	Sirius
Part Number	SIR-X-X-20W-S/T-XXXX
Cutout	Ø95mm
Size(HxWxL)	119x105mm/119x105x105mm
Driver	20 Watt constant current (dimming optional)
Color Rendering Index CRI	80% or 90%
Beam Angle	10° / 24° / 38°
Storage Temperature	- 40 - +85°C
IP Rating	-IP20
Lifespan	50,000 Hours
COB type	Citizen, Cree, Philips, Bridglux
Input	220 / 50- 60Hz
Power Factor Correction PFC	>.90
Reflector Color	Sand gold / White/ Chrome/ Silver / Pearl Black/ Black
Flux	2400 Lumen
Correlated Color Temperature CCT	2700K / 3000K / 4000K
Warranty	Up to 5 Years

FEATURES

- ◆ Reflector cover, 6 colors are optional to meet the needs of different occasions.
- ◆ The Driver is included and it can be IP20 or IP67 (as an option) and PF>0.9. Dimming Optional.
- ◆ Deep reflection cup, UGR < 16.
- ◆ Suitable for all kinds of ceiling thickness, maximum, up to 30mm.
- ◆ Light is filtered through reflecting cup and anti-glare honeycomb to effectively reduce excess beam.
- ◆ Rotate 355 degrees horizontally. Every rotation is just right.
- ◆ Pre-embedded design, quick installation and convenient maintenance of lamps and lanterns.
- ◆ Innovation and High Efficiency Black Light Mirror.
- ◆ Four-stop tilt angle adjustment, positioning circle inside, and ni-stop are just right.

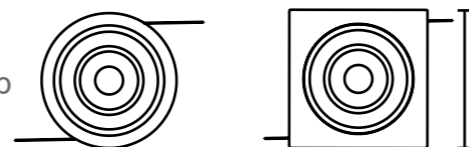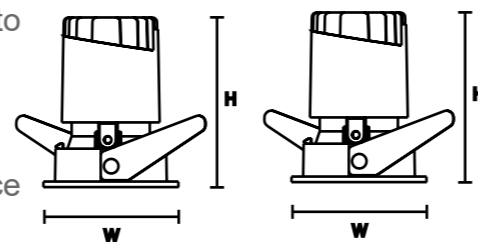

BEAM ANGLE

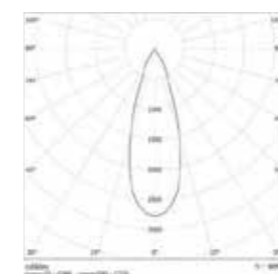

PRODUCT APPLICATION

Shopping centers, Malls, Hospitals, Shops, Offices, Schools, Restaurants, General Lighting etc..



PRODUCT DIMENSION

Model	H mm	W mm	L mm
SIR-S-X-20W-S/T-XXXX	119	105	105
SIR-R-X-20W-S/T-XXXX	119	105	---

Order Code

Color Temperature

LED Power

SIR-R-N-20W-S/T-XXXX

2700K / 3000K / 4000K

20W

SIR-S-N-20W-S/T-XXXX

2700K / 3000K / 4000K

20W


Sirius Down Light

PRODUCT DETAILS


Family Name	Sirius
Part Number	SIR-X-X-35W-S/T-XXXX
Cutout	Ø120mm
Size(HxWxL)	145x133mm/145x133x133mm
Driver	35 Watt constant current (dimming optional)
Color Rendering Index CRI	80% or 90%
Beam Angle	10° / 24° / 38°
Storage Temperature	- 40 - +85°C
IP Rating	-IP20
Lifespan	50,000 Hours
COB type	Citizen, Cree, Philips, Bridglux
Input	220 / 50- 60Hz
Power Factor Correction PFC	>.90
Reflector Color	Sand gold / White/ Chrome/ Silver / Pearl Black/ Black
Flux	4200 Lumen
Correlated Color Temperature CCT	2700K / 3000K / 4000K
Warranty	Up to 5 Years

FEATURES

- ◆ Reflector cover, 6 colors are optional to meet the needs of different occasions.
- ◆ The Driver is included and it can be IP20 or IP67 (as an option) and PF>0.9. Dimming Optional.
- ◆ Deep reflection cup, UGR < 16.
- ◆ Suitable for all kinds of ceiling thickness, maximum, up to 30mm.
- ◆ Light is filtered through reflecting cup and anti-glare honeycomb to effectively reduce excess beam.
- ◆ Rotate 355 degrees horizontally. Every rotation is just right.
- ◆ Pre-embedded design, quick installation and convenient maintenance of lamps and lanterns.
- ◆ Innovation and High Efficiency Black Light Mirror.
- ◆ Four-stop tilt angle adjustment, positioning circle inside, and ni-stop are just right.

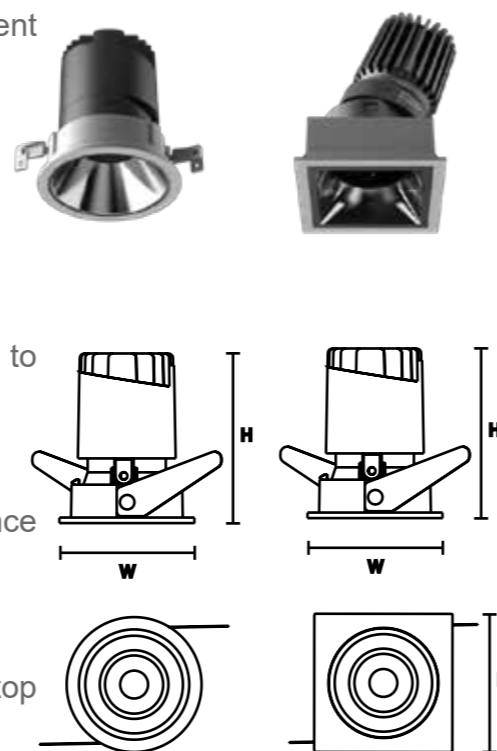

BEAM ANGLE

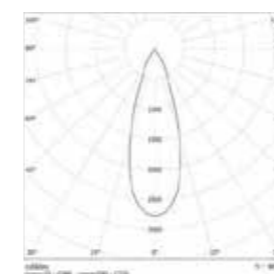

PRODUCT APPLICATION

Shopping centers, Malls, Hospitals, Shops, Offices, Schools, Restaurants, General Lighting etc..



PRODUCT DIMENSION

Model	H mm	W mm	L mm
SIR-S-X-35W-S/T-XXXX	145	133	133
SIR-R-X-35W-S/T-XXXX	145	133	---

Order Code

Color Temperature

LED Power

SIR-R-N-35W-S/T-XXXX

2700K / 3000K / 4000K

35W

SIR-S-N-35W-S/T-XXXX

2700K / 3000K / 4000K

35W