




ZETA Down
Light



APPLICATION

Villas, Palaces, Apartment, Hotels, Restaurants, Shopping Areas, Building and Offices.

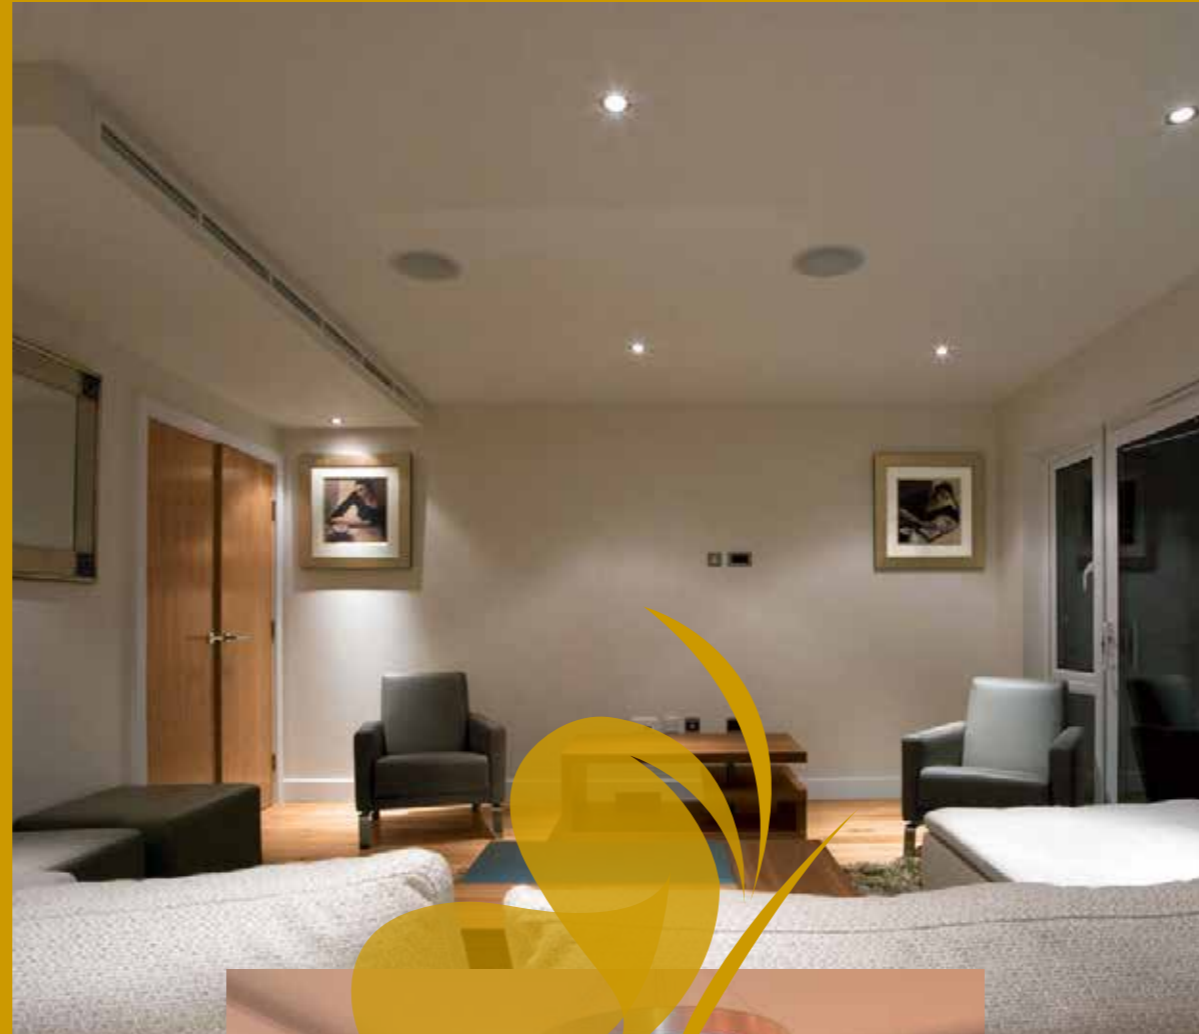

FEATURES

Zeta family is used as pure light source, using LED technology. Human and environment friendly, no PB, Hg nor UV which may harm the human and the environment.

High power saving fixture, no decay and color temperature shift.

Can be dimmable (through direct control or via network) and not dimmable.





Zeta Down Light

PRODUCT DETAILS

Family Name	Zeta
Part Number	ZET-DL-7W-SMD- XX
Materials	Die-cast aluminum, Pc and Eco- Friendly Lens materials
Installation	Recessed Mounting
Power	7W
Color Rendering Index CRI	80%
Beam Angle	160°
Storage Temperature	- 40 - +85°C
IP Rating	IP20
Lifespan	50,000 Hours
Lumen/Watt	120/130 Lm/W
Input	220 VAC / 50- 60Hz
Power Factor Correction PFC	>.90
LEDs	LED 3528
Flux	861 Lum
Correlated Color Temperature CCT	6000/ 4000 / 3000
Warranty	Up to 5 Years

FEATURES

- ◆ Fixture designed for Harsh and hot environments.
- ◆ High lumen output.
- ◆ Power saving: as it replaces the Sodium, metal halide so it saves between 50% to 75% of the consumed power.
- ◆ Unlimited numbers of on/off switching cycles.
- ◆ Aluminum heat dissipation module has surface anodic oxidation process to make it very resistant and anti-aging fixture.
- ◆ Over temperature protection, Overload protection, Short-circuit protection, and No-load protection.
- ◆ The Driver is included and it is IP20 and PF>0.9.
- ◆ Dimmable option available with different control options Long life 50000 Hours.
- ◆ Up to five years warranty.



7w
861LM

3000K
6000K

160

50 000
Hours


CRI
> 80

IP 20

RAL
7045

Up to
5 Year
Guarantee

BEAM ANGLE



PRODUCT APPLICATION

Shopping centers, Malls, Hospitals, Shops, Offices, Schools, Restaurants, General Lighting etc..



PRODUCT DIMENSION	
Model	Hole size
ZET-DL-7W-SMD-XX	Ø 3"

Order Code	Color Temperature	LED Power
ZET-DL-7W-SMD- 3000	3000K	7W
ZET-DL-7W-SMD- 4000	4000K	7W
ZET-DL-7W-SMD- 6000	6000K	7W



Zeta Down Light

PRODUCT DETAILS

Family Name	Zeta
Part Number	ZET-DL-20W-SMD- XX
Materials	Die-cast aluminum, Pc and Eco- Friendly Lens materials
Installation	Recessed Mounting
Power	20W
Color Rendering Index CRI	80%
Beam Angle	160°
Storage Temperature	- 40 - +85°C
IP Rating	IP20
Lifespan	50,000 Hours
Lumen/Watt	120/130 Lm/W
Input	220 VAC / 50- 60Hz
Power Factor Correction PFC	>.90
LEDs	LED 3528
Flux	2460 Lum
Correlated Color Temperature CCT	6000/ 4000 / 3000
Warranty	Up to 5 Years

FEATURES

- ◆ Fixture designed for Harsh and hot environments.
- ◆ High lumen output.
- ◆ Power saving: as it replaces the Sodium, metal halide so it saves between 50% to 75% of the consumed power.
- ◆ Unlimited numbers of on/off switching cycles.
- ◆ Aluminum heat dissipation module has surface anodic oxidation process to make it very resistant and anti-aging fixture.
- ◆ Over temperature protection, Overload protection, Short-circuit protection, and No-load protection.
- ◆ The Driver is included and it is IP20 and PF>0.9.
- ◆ Dimmable option available with different control options Long life 50000 Hours.
- ◆ Up to five years warranty.



20w
2460LM

3000K
6000K

160

50 000
Hours


CRI
> 80

IP 20

RAL
7045

Up to
5 Year
Guarantee

BEAM ANGLE



PRODUCT APPLICATION

Shopping centers, Malls, Hospitals, Shops, Offices, Schools, Restaurants, General Lighting etc..



PRODUCT DIMENSION	
Model	Hole size
ZET-DL-20W-XX-SMD-XX	Ø 8"

Order Code	Color Temperature	LED Power
ZET-DL-20W-SMD- 3000	3000K	20W
ZET-DL-20W-SMD- 4000	4000K	20W
ZET-DL-20W-SMD- 6000	6000K	20W



Zeta Down Light

PRODUCT DETAILS

Family Name	Zeta
Part Number	ZET-DL-30W-SMD- XX
Materials	Die-cast aluminum, Pc and Eco- Friendly Lens materials
Installation	Recessed Mounting
Power	30W
Color Rendering Index CRI	80%
Beam Angle	160°
Storage Temperature	- 40 - +85°C
IP Rating	IP20
Lifespan	50,000 Hours
Lumen/Watt	120/130 Lm/W
Input	220 VAC / 50- 60Hz
Power Factor Correction PFC	>.90
LEDs	LED 3528
Flux	3690 Lum
Correlated Color Temperature CCT	6000/ 4000 / 3000
Warranty	Up to 5 Years

FEATURES

- ◆ Fixture designed for Harsh and hot environments.
- ◆ High lumen output.
- ◆ Power saving: as it replaces the Sodium, metal halide so it saves between 50% to 75% of the consumed power.
- ◆ Unlimited numbers of on/off switching cycles.
- ◆ Aluminum heat dissipation module has surface anodic oxidation process to make it very resistant and anti-aging fixture.
- ◆ Over temperature protection, Overload protection, Short-circuit protection, and No-load protection.
- ◆ The Driver is included and it is IP20 and PF>0.9.
- ◆ Dimmable option available with different control options Long life 50000 Hours.
- ◆ Up to five years warranty.




PRODUCT APPLICATION

Shopping centers, Malls, Hospitals, Shops, Offices, Schools, Restaurants, General Lighting etc..

PRODUCT DIMENSION

Model	Hole size
ZET-DL-30W-XX-SMD-XX	Ø 8"

BEAM ANGLE



Order Code	Color Temperature	LED Power
ZET-DL-30W-SMD- 3000	3000K	30W
ZET-DL-30W-SMD- 4000	4000K	30W
ZET-DL-30W-SMD- 6000	6000K	30W





Zeta Down Light

PRODUCT DETAILS

Family Name	Zeta
Part Number	ZET-DL-35W-SMD- XX
Materials	Die-cast aluminum, Pc and Eco- Friendly Lens materials
Installation	Recessed Mounting
Power	35W
Color Rendering Index CRI	80%
Beam Angle	160°
Storage Temperature	- 40 - +85°C
IP Rating	IP20
Lifespan	50,000 Hours
Lumen/Watt	120/130 Lm/W
Input	220 VAC / 50- 60Hz
Power Factor Correction PFC	>.90
LEDs	LED 3528
Flux	4305 Lum
Correlated Color Temperature CCT	6000/ 4000 / 3000
Warranty	Up to 5 Years

FEATURES

- ◆ Fixture designed for Harsh and hot environments.
- ◆ High lumen output.
- ◆ Power saving: as it replaces the Sodium, metal halide so it saves between 50% to 75% of the consumed power.
- ◆ Unlimited numbers of on/off switching cycles.
- ◆ Aluminum heat dissipation module has surface anodic oxidation process to make it very resistant and anti-aging fixture.
- ◆ Over temperature protection, Overload protection, Short-circuit protection, and No-load protection.
- ◆ The Driver is included and it is IP20 and PF>0.9.
- ◆ Dimmable option available with different control options Long life 50000 Hours.
- ◆ Up to five years warranty.



35w
4305LM

3000K
6000K

160

50 000
Hours


CRI
> 80

IP 20

RAL
7045

Up to
5 Year
Guarantee

BEAM ANGLE



PRODUCT APPLICATION

Shopping centers, Malls, Hospitals, Shops, Offices, Schools, Restaurants, General Lighting etc..



PRODUCT DIMENSION	
Model	Hole size
ZET-DL-35W-XX-SMD-XX	Ø 8"

Order Code	Color Temperature	LED Power
ZET-DL-35W-SMD- 3000	3000K	35W
ZET-DL-35W-SMD- 4000	4000K	35W
ZET-DL-35W-SMD- 6000	6000K	35W

Zeta DLP Down Light

PRODUCT DETAILS


Family Name	Zeta
Part Number	ZET-DLP-6-18-XX-SMD-T
Materials	Aluminum, Pc and Eco- Friendly materials, Tempered glass
Installation	Recessed Mounting
Power	18W
Color Rendering Index CRI	80%
Beam Angle	110°
Storage Temperature	- 40 - +85°C
IP Rating	IP20
Lifespan	50,000 Hours
Lumen/Watt	120/130 Lm/W
Input	220 / 50- 60Hz
Power Factor Correction PFC	>.90
LEDs	SMD 2835
Flux	2160 Lum
Correlated Color Temperature CCT	6000/ 4000 / 3000
Warranty	Up to 5 Years

FEATURES

- ◆ Fixture designed for Harsh and hot environments.
- ◆ High lumen output.
- ◆ Power saving: as it replaces the Sodium, metal halide so it saves between 50% to 75% of the consumed power.
- ◆ Unlimited numbers of on/off switching cycles.
- ◆ Aluminum heat dissipation module has surface anodic oxidation process to make it very resistant and anti-aging fixture
- ◆ Over temperature protection, Overload protection, Short-circuit protection, and No-load protection
- ◆ The Driver is included and it is IP20 and PF>0.9.
- ◆ Dimmable option available with different control options Long life 50000 Hours.
- ◆ Up to five years warranty.



BEAM ANGLE



PRODUCT APPLICATION

Shopping centers, Malls, Hospitals, Shops, Offices, Schools, Restaurants, General Lighting etc..

PRODUCT DIMENSION

Model	Hole size
ZET-DLP-8-25W-XX-SMD-T	Ø 6"

Order Code	Color Temperature	LED Power
ZET-DLP-6-18W-3000-SMD-T	3000K	18W
ZET-DLP-6-18W-4000-SMD-T	4000K	18W
ZET-DLP-6-18W-6000-SMD-T	6000K	18W



Zeta DLP Down Light

PRODUCT DETAILS

Family Name	Zeta
Part Number	ZET-DLP-6-25-XX-SMD-T
Materials	Aluminum, Pc and Eco- Friendly materials, Tempered glass
Installation	Recessed Mounting
Power	25W
Color Rendering Index CRI	80%
Beam Angle	110°
Storage Temperature	- 40 - +85°C
IP Rating	IP20
Lifespan	50,000 Hours
Lumen/Watt	120/130 Lm/W
Input	220 / 50- 60Hz
Power Factor Correction PFC	>.90
LEDs	SMD 2835
Flux	2160 Lum
Correlated Color Temperature CCT	6000/ 4000 / 3000
Warranty	Up to 5 Years

FEATURES

- ◆ Fixture designed for Harsh and hot environments.
- ◆ High lumen output.
- ◆ Power saving: as it replaces the Sodium, metal halide so it saves between 50% to 75% of the consumed power.
- ◆ Unlimited numbers of on/off switching cycles.
- ◆ Aluminum heat dissipation module has surface anodic oxidation process to make it very resistant and anti-aging fixture
- ◆ Over temperature protection, Overload protection, Short-circuit protection, and No-load protection
- ◆ The Driver is included and it is IP20 and PF>0.9.
- ◆ Dimmable option available with different control options Long life 50000 Hours.
- ◆ Up to five years warranty.




PRODUCT APPLICATION

Shopping centers, Malls, Hospitals, Shops, Offices, Schools, Restaurants, General Lighting etc..

PRODUCT DIMENSION

Model	Hole size
ZET-DLP-8-25W-XX-SMD-T	Ø 8"



Order Code	Color Temperature	LED Power
ZET-DLP-8-25W-3000-SMD-T	3000K	25W
ZET-DLP-8-25W-4000-SMD-T	4000K	25W
ZET-DLP-8-25W-6000-SMD-T	6000K	25W





Zeta DLS Down Light

PRODUCT DETAILS

Family Name	Zeta
Part Number	ZET-DLS-30W-XX
Materials	Die-cast aluminum, Pc and Eco- Friendly Lens materials
Installation	Recessed Mounting, Surface Mounted, Suspended
Power	30W
Color Rendering Index CRI	80%
Beam Angle	160°
Storage Temperature	- 40 - +85°C
IP Rating	IP44
Lifespan	50,000 Hours (Saat)
Lumen/Watt	120/130 Lm/W
Input	220 VAC / 50- 60Hz
Power Factor Correction PFC	>.90
LEDs	LED 3528
Flux	3690 Lum
Correlated Color Temperature CCT	6000/ 4000 / 3000
Warranty	Up to 5 Years

FEATURES

- ◆ Fixture designed for Harsh and hot environments.
- ◆ High lumen output.
- ◆ Power saving: as it replaces the Sodium, metal halide so it saves between 50% to 75% of the consumed power.
- ◆ Unlimited numbers of on/off switching cycles.
- ◆ Aluminum heat dissipation module has surface anodic oxidation process to make it very resistant and anti-aging fixture
- ◆ Over temperature protection, Overload protection, Short-circuit protection, and No-load protection
- ◆ The Driver is included and it is IP20 and PF>0.9.
- ◆ Dimmable option available with different control options Long life 50000 Hours.
- ◆ Up to five years warranty.



PRODUCT APPLICATION


Shopping centers, Malls, Hospitals, Shops, Offices, Schools, Restaurants, General Lighting etc..



PRODUCT DIMENSION

Model	Hole size
ZET-DLS-30W-XX	Ø 8"

BEAM ANGLE



Order Code	Color Temperature	LED Power
ZET-DLS-30W-3000	3000K	30W
ZET-DLS-30W-4000	4000K	30W
ZET-DLS-30W-6000	6000K	30W