


GLEC-DAL2-26-700 EDS M

26W Constant Current Dimmable DALI2 Mini Series

Constant Current DALI2-Smart series is constant current LED driver with 150 to 700 mA output current, and the output current is selectable by DIP switch, it is easy to integrated in LED panel, downlight product. It is supported with short circuit and overload protection.

Application

- ◆ LED strips
- ◆ LED panel
- ◆ Spot
- ◆ Down Light

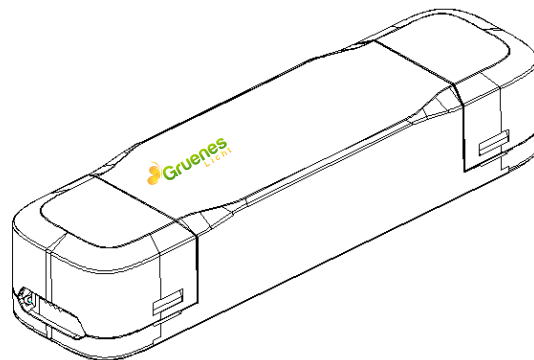

Features

- ◆ Flicker free & DIP Switch
- ◆ Class II, SELV, independent.
- ◆ Protections: SCP/OLP/OVP/OTP.
- ◆ Power Factor >0.9
- ◆ Efficiency $\geq 85\%$.
- ◆ Support DALI II, Push Dimming.
- ◆ 5 Year Warranty.

GLEC-DAL2-26-700 EDS M

Technical data


Input	Ac input voltage	220-240
	VACDC input voltage	176-280V
	Frequency(Hz)	60/50/0 Hz
	Power Factor	>0.9@220-240VAC, full load
	Input Current max	0.2A MAX. @Full Load,176VAC
	Start-up time	< 1S
	Unload Power Consumption	≤0.5W
	Inrush Current	30A Max.
Output	Constant Current	150/.../700mA
	No load voltage	Max 60 VDC
	Output voltage range	9-52VDC
	Rated power	26.3W Max.
	Load Regulation	±5%@220-240VAC
	Hold-up Time	1s max.@Full Load
	Efficiency(Typ.)	≥%85
Dimming	Dimmable	YES
	Dimming mode	DALI II, Push
	; Dimming current range	Io≥500mA : %1~%100 Io< 500mA : 5mA(min) ~%100
Protection	Over Load Protection	103-120% Protection type: Latch off
	Over Voltage Protection	> 60VDC Protection type: Latch off
	Short circuit Protection	Protection type: Latch off
	Over Temperature protection	Protection type:Auto Resume
Environment	Operating Temperature	20-°C...50+°C
	tc	90 C
	Humidity	20%-90%RH
	Safety standards	EN 61347-1; EN61347-2-13; EN62384
	Withstand voltage	Input-Output : 3750V/5mA/1min
	EMI	EN55015; EN61000-3-2 Class C; EN61000-3-3
	EMS	EN 61547; EN 61000-4-2; EN 61000-4-5--1000V;
	Dimension(LXWXH)	97X43X30mm
Note	Ripple and noise are measured at 20MHZ of bandwidth by using a 300mm twisted pair-wire terminated	
	All parameters NOT specially mentioned are measured at 240VAC input, full load	

GLEC-DAL2-26-700 EDS M

Adjustable Output Current with dip-switch


Vo	Po	Io	1	2	3	4
9-52VDC	7.8 W	150mA	--	ON	--	--
9-52VDC	10.4 W	200mA	--	ON	--	ON
9-52VDC	13 W	250mA	--	ON	ON	--
9-52VDC	15.6 W	300mA	--	ON	ON	ON
9-52VDC	18.2 W	350mA	ON	--	--	--
9-52VDC	20.8 W	400mA	ON	--	--	ON
9-52VDC	23.4 W	450mA	ON	--	ON	--
9-52VDC	26 W	500mA	ON	--	ON	ON
9-47.5VDC	26.1 W	550mA	ON	ON	--	--
9-43.5VDC	26.1 W	600 mA	ON	ON	--	ON
9-40VDC	26 W	650 mA	ON	ON	ON	--
9-37.5VDC	26.3 W	700mA	ON	ON	ON	ON

Wiring diagram

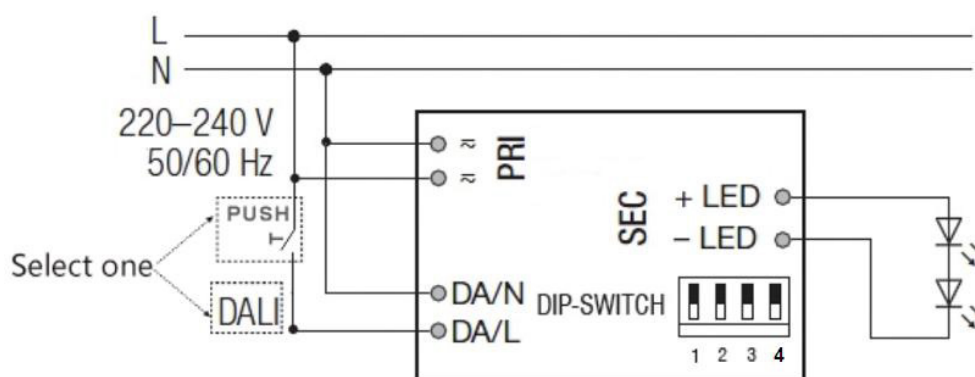

GLEC-DAL2-26-700 EDS M

Operating window

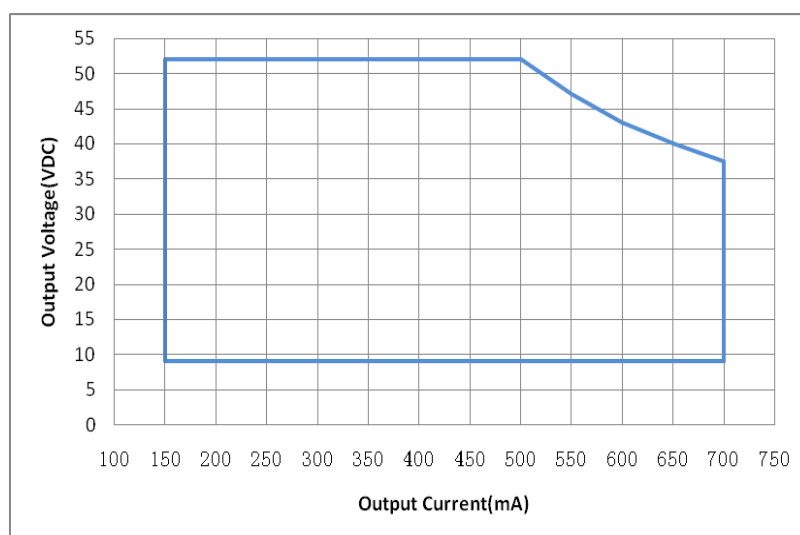

Dimensions

